



Aerating Grain in Storage




UNIVERSITY OF GEORGIA
EXTENSION

Contents

- Moisture Movement in Metal Bins 3
- Air Flow Requirements 3
- Direction of Air Flow 4
- Air Distribution Methods 5
- Grain Pressure on Ducts 6
- Fan Operation 7
- Equilibrium Moisture Content of Grain 7
- Time Required for Aeration 8
- Operating Costs 8
- Controls 8

Original publication prepared by Cecil Hammond (ret.).

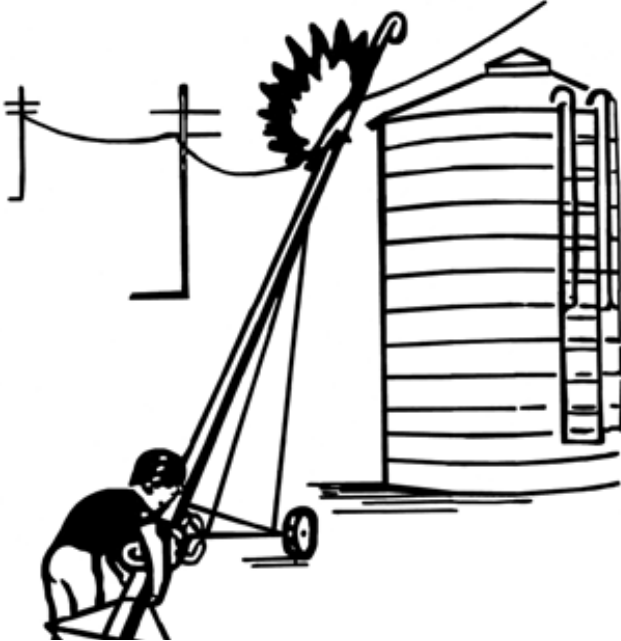

Aerating Grain in Storage

*Revised by John Worley
Professor Emeritus, University of Georgia*

Estimated annual grain loss from harvest to consumption is approximately 10 percent of total production. About half the loss occurs during harvest; the remainder in storage. These losses can be reduced and, in the case of storage, eliminated if proper procedures are followed.

Aeration is a process of moving small volumes of air through grain or seed to cool and ventilate the material and maintain quality. The moisture content of the seed or grain is changed very little by aeration due to the low volume of air. So do not confuse aeration with *drying*, which reduces moisture to a level acceptable for safe storage or commercial sale. Drying can be a rapid process if heated air and high air flow rates are used, and it changes the moisture content considerably in a short period. The terms *aeration* and *drying* are both used in referring to moisture control and preservation of grain and seed, and the two should not be confused.

Aeration conditions grain and seed by lowering the temperature of the material and equalizing the temperature within the storage structure. This prevents moisture migration and condensation.

All organisms responsible for losses in stored grain and seed are affected by the condition (temperature and moisture) of the material. Such organisms include bacteria, insects, molds and mites. So cool, dry grain and seed keep longer if these deteriorating elements are prevented.

These elements are greatly inhibited at temperatures below 40 degrees F. Little insect reproduction occurs in grain below 60 degrees F. Aeration, however, is an aid to insect control, not a substitute for fumigation.

Moisture Movement in Metal Bins

Moisture often condenses in the top of stored grain even if the grain was dry at the time of storage and was stored in a weather-tight bin. Grain and seed are normally placed in bins in the fall of the year and lose heat as winter progresses. The material near the walls and surface cools faster than the material in the center. This temperature differential within the bin produces air currents, as shown in Figure 1.

The air near the bin walls cools, becomes denser and settles downward, producing a downward motion near the walls. The air in the center portion of the bin is heated, expands and becomes lighter, causing it to rise. The warmer air has greater moisture-holding capacity and,

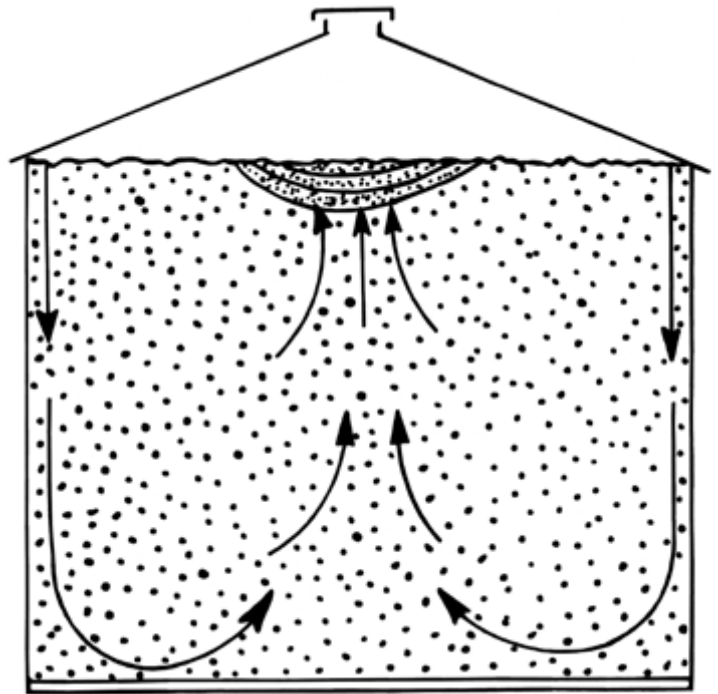


Figure 1. Air currents in stored grain produced by differential cooling.

therefore, absorbs moisture from the grain near the center of the bin. As this warm, moist air rises through the top layer of cooler grain, the air is cooled and loses some of its water-holding capacity, thus producing condensation.

Also, as this air from the center continues to rise to the underside of the bin roof, further condensation occurs if the surface is cool. Water, therefore, accumulates in the top layer of grain because of these air currents moving through the grain, even though the bin is weather tight. The moisture condensation accumulation in the top layers of grain produces spoilage.

Air Flow Requirements

Adequate air must reach all areas of the stored grain to cool it before condensation begins. Satisfactory aeration depends primarily upon air flow rate. The air flow rate through the grain will not be uniform where ducts are used. Thus, the air flow rate is an average value and must be high enough for adequate air supply to reach the grain in all areas of storage.

Air distribution usually is more uniform in upright bins than in flat storage. For this reason, higher air flows are recommended for flat storage bins. Recommended air

Table 1. Horsepower Requirements and Static Pressure for Aeration Fan Operation

Depth of Grain (feet)	Horsepower per 1,000 bushels at various air flow rates and grain depths			Static Pressure (inches of water) at various air flow rates and grain depths		
	1/5 CFM/bu.	1/10 CFM/bu.	1/20 CFM/bu.	1/5 CFM/bu.	1/10 CFM/bu.	1/20 CFM/bu.
Shelled Corn						
10-15	0.04	0.02	0.01	0.60	0.55	0.51
20	0.05	0.02	0.01	0.70	0.65	0.57
25	0.06	0.03	0.01	1.00	0.77	0.63
Soybeans						
10-15	0.04	0.01	0.01	0.50	0.50	0.50
20	0.05	0.02	0.01	0.70	0.55	0.50
25	0.10	0.02	0.01	0.90	0.65	0.50
Wheat						
10	0.05	0.03	0.02	1.05	1.00	0.95
15	0.08	0.04	0.02	1.45	1.25	1.05
20	0.10	0.05	0.02	2.00	1.60	1.20
25	0.15	0.07	0.03	2.70	2.05	1.45
Oats						
10	0.05	0.03	0.01	0.90	0.80	0.70
15	0.07	0.03	0.02	1.25	0.95	0.80
20	0.09	0.04	0.02	1.70	1.20	0.92
25	0.15	0.05	0.02	2.50	1.50	1.07
Grain Sorghum						
10	0.05	0.03	0.02	1.05	1.00	0.95
15	0.08	0.04	0.02	1.45	1.25	1.05
20	0.10	0.05	0.02	2.00	1.60	1.20
25	0.15	0.07	0.03	2.70	2.05	1.45

flow rates for intermittent operation in the southeast are as follows:

upright storage - 1/10 to 1/20 CFM per bushel

flat storage - 1/5 to 1/10 CFM per bushel

Do not use lower rates unless moisture content is less than 12 percent (wet basis).

Horsepower requirements and static pressure in inches of water for aeration fan operation are shown in Table 1. The table is valid only for clean grain without excessive fines or chaff.

Suppose you want to aerate 5,000 bushels of wheat stored at a depth of 15 feet with an air flow of 1/10 CFM per bushel. The horsepower required to drive the fan is $5 \times 0.04 = 0.2$, or less than $\frac{1}{4}$ H.P. The air flow is 500 CFM and the static pressure against the fan is 1.25 inches.

Direction of Air Flow

Normally, the air should be drawn downward through stored grain, counteracting the tendency of the warm air to rise. Some condensation may occur when warm, moist air rises through a cooler top layer. Moving the air downward cools the upper layers of grain first and reduces the possibility of moisture migration.

If heat is trapped above the grain in partially filled bins, the downward motion of the air can raise the grain temperature, which is undesirable. Under these conditions, open the bin top and allow the hot air to rise before aeration begins.

It may be necessary to reverse the air flow in grain containing fines, which accumulate near perforated ducts, blocking air movement. If the air flow rate is high, the direction of air flow is not critical, so it is normally not

necessary to reverse the direction of rotation of a drying fan used for aeration.

Air Distribution Methods

Perforated floors distribute air uniformly and are well suited for aeration and are also frequently used with various drying systems. It is often not feasible to install a perforated floor for aeration only. Ducts are less expensive and satisfactory for aeration. However, ducts above the floor make it impossible to use sweep augers. Vertical aerators, as shown in Figure 2, are effective in round storage bins and normally can be used with sweep augers for unloading the bins. Some vertical aerators are portable and can be installed after the bins are filled. One aerator can serve bins up to 18 feet in diameter if air flow is adequate.

Aeration ducts, as shown in Figure 3, can be used to distribute air for aeration. Short ducts (length over diameter less than 50) should have openings or perforations equally spaced over their surface area for air passage into the grain. For uniform air distribution in long ducts, the percentage of perforation in relation to the duct surface must be lowest at the fan end. The perforation in long ducts (length over diameter greater than 50) can be as low as 1 percent near the fan and as high as 20 percent at the farthest point.

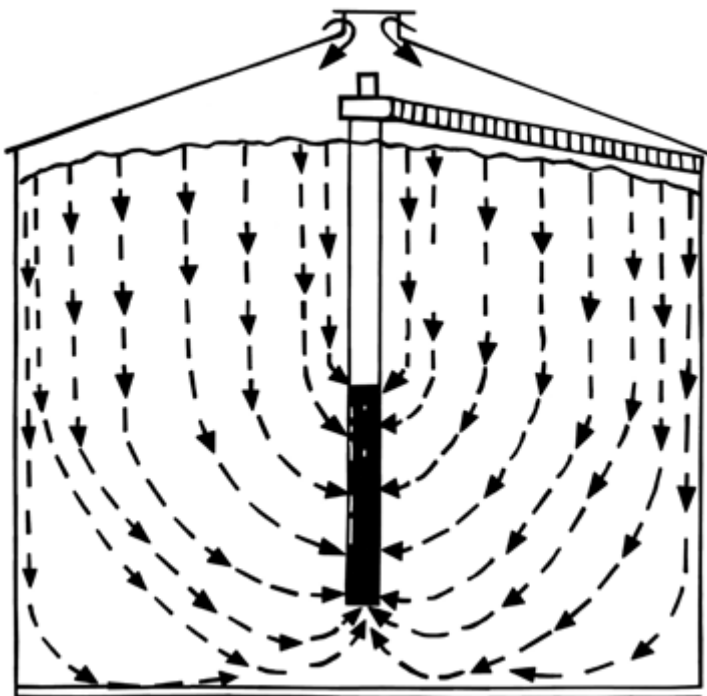


Figure 2. Vertical aerators are satisfactory for smaller bins, usually aerating 5,000 bushels or fewer. If used in square or rectangular bins, the distance between aerators should not appreciably exceed the grain depth.

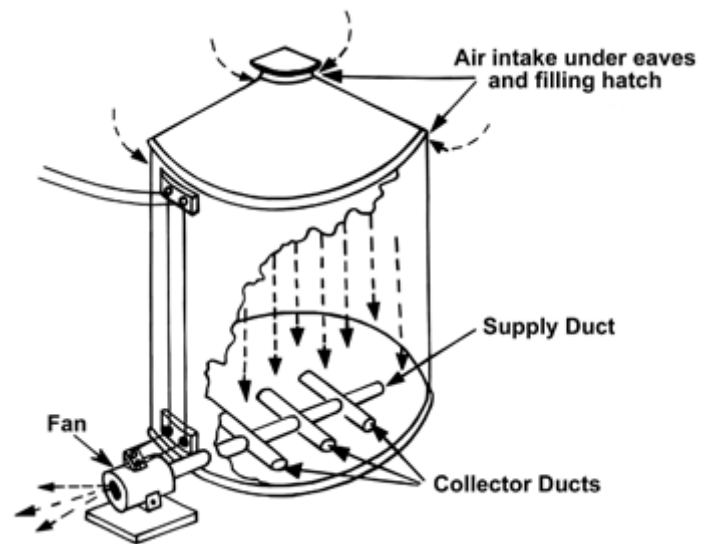


Figure 3. Duct system for round or rectangular bins.

The calculation of the perforation distribution in long ducts requires the services of an engineer. It is desirable for ducts to have enough perforated surface area to limit air velocity through the grain near the duct to 20 feet per minute or less, even though the velocity through the perforation may be 10 times this value.

Friction losses in ducts increase as air velocity increases. Ducts must be large enough to prevent excessive static pressure losses from duct friction. Air velocities in ducts of 1,000 feet to 1,500 feet per minute are desirable. The cross-sectional area of supply ducts can be determined as follows:

$$\text{Area of Duct Cross-Section (sq. ft.)} = \frac{\text{Total Air Volume (CFM)}}{\text{Air Velocity (ft./min.)}}$$

Suppose you want to determine the supply duct size for aerating the wheat in the previous example using an air velocity in the duct of 1,000 feet per minute. The required duct size is:

$$\frac{500 \text{ CFM}}{1,000 \text{ CFM}} = 0.5 \text{ sq. ft.}$$

A 10-inch circular supply duct or a 6-inch by 12-inch rectangular supply duct would be sufficient (Table 2, p. 6). The total cross-sectional area of the collector ducts should have at least as much area as the supply duct.

To prevent excessive friction losses as the air enters the perforated ducts and leaves the grain, the duct needs enough perforated surface area to limit air velocity through the grain near the duct to 20 feet per minute or less. This determines the minimum length of the duct. The area of the duct perforations should be at least 10 percent of the total duct surface. Distribution of these perforations is discussed under "Air Distribution Methods."

Table 2. Cross-Sectional Area of Ducts

Diameter or Depth (inches)	Area in Square Feet of Circle	Area in Square Feet of Rectangle when Top Width in Inches Is:			
		9	12	15	18
4	0.08	0.25	0.33	0.41	0.50
6	0.20	0.38	0.50	0.62	0.75
8	0.35	0.50	0.67	0.83	1.00
10	0.55	0.62	0.83	1.04	1.25
12	0.75	0.75	1.00	1.25	1.50
14	1.05	0.88	1.16	1.46	1.75
16	1.40	1.00	1.33	1.67	2.00
18	1.75	1.12	1.50	1.88	2.25

Table 3. Surface Area of Round and Rectangular Ducts

Diameter or Depth (inches)	Round Duct (square feet)	Rectangular Duct (square feet) when top width is : (inches)			
		9	12	15	18
4	1.05	1.42	1.67	1.92	2.17
6	1.57	1.75	2.00	2.25	2.50
8	2.09	2.08	2.33	2.58	2.83
10	2.62	2.42	2.67	2.92	3.17
12	3.14	2.75	3.00	3.25	3.50
14	3.67	3.08	3.33	3.58	3.83
16	4.19	3.42	3.67	3.92	4.17
18	4.71	3.75	4.00	4.25	4.50

The total required surface area of a perforated duct can be determined as follows:

$$\text{Total Duct Surface Area (sq.ft.)} = \frac{\text{Total Air Volume (CFM)}}{\text{Duct Surface Velocity (FPM)}}$$

In the previous example:

$$\frac{500 \text{ CFM}}{20 \text{ FPM}} = 25 \text{ sq. ft. of duct surface area}$$

The surface area (square feet) per foot of length for the ducts given in Table 2 is given in Table 3.

Assuming the 10-inch diameter round pipe, as previously mentioned:

$$\frac{25 \text{ sq.ft of duct surface area}}{2.62 \text{ (Table 3, 10" pipe)}} = 9.61 \text{ min. length of perforated pipe required}$$

Grain Pressure on Ducts

Ducts can be of any geometric shape or configuration. They are normally made of wood, steel, concrete, ceramic material, plastic or a combination of these materials. For example, ducts can be made of two rows of concrete blocks and boards by placing short boards over the blocks and leaving cracks for air movement. Wire screen placed over such a duct will keep grain out of it. The duct must be strong enough to support the grain regardless of its shape or material used.

The vertical and lateral loads on ducts can be determined from Table 4 (page 7) if the depth and type of grain are known. The table shows the maximum weight of common grain in pounds per cubic foot for calculating vertical loads, equivalent fluid weight for calculating

lateral loads and the angle of repose for calculating the filling or emptying configurations.

Suppose you need to know the vertical and lateral loads on a duct covered with soybeans to a depth of 15 feet. The load in pounds per square foot is determined by multiplying the grain depth in feet by the densities in pounds per cubic foot given in Table 4.

Vertical load on top of duct
(lbs. per sq. ft.) = 46.4 lbs. per ft. x 15 ft. deep
= 696 lbs. per sq. ft.

Lateral load on vertical surface (lbs. per sq. ft.) = 16.1 lbs. per ft. x 15 ft. deep
= 242 lbs. per sq. ft.

The lateral load acts on a vertical surface such as walls or sides of ducts. The angle of repose is the angle measured from the horizontal, which the granular materials takes if allowed to pile or funnel.

Fan Operation

Aeration should begin when outside air temperature is approximately 10 degrees F below the grain temperature. Measure the grain temperature at several points with a thermometer encased in a pipe that is inserted into the grain. Measuring the temperature of exhaust air will give an indication of the average grain temperature. The exhaust air temperature, however, will not detect “hot spots.”

A grain temperature of 50 degrees F is generally satisfactory, particularly if the grain is to be moved the following summer. For grain that is to be stored more than a

year, lowering the temperature below 50 degrees F will give better insect and mold control. If cold grain is removed from storage on a warm, humid day, condensation may occur. Operating the fan and warming the grain to within 15 to 20 degrees F of the air temperature will help control this.

Aerate the grain with air that does not change the grain moisture content. Air flow is usually low enough to allow only gradual moisture changes. Continuous aeration with air flows of 1/20 to 1/50 CFM per bushel, even in rainy weather, will not appreciably change grain moisture content.

Crop drying fans, if used for aeration, have considerable capacity and should not be operated when humidity is extremely high or low. The higher air flow cools the grain rapidly. It is desirable to aerate with these fans only when the humidity is below 60 percent and the grain is 10 to 15 degrees F warmer than outside air temperature under these conditions. During warm periods, aerate during the cooler part of the day (evening or early morning). Operate the fan continuously for a few days to remove harvest heat.

Equilibrium Moisture Content of Grain

Grain moisture content is related to the temperature and relative humidity of the air that surrounds it. Under certain conditions grain will absorb moisture; under other conditions it releases moisture. Under proper conditions of temperature and humidity, grain will neither lose nor gain moisture. This condition, called *equilibrium mois-*

Table 4. Design Data and Storage Pressures for Grain

Grain	Angle of Repose (degrees)		Equivalent Fluid Weight per Cubic Foot* (lbs./cu. ft.)	Maximum Weight per Cubic Foot (lbs./cu. ft.)
	Emptying or Funneling	Filling or Piling		
Shelled Corn	27	16	18.0	48.0
Soybeans	29	16	16.1	46.4
Oats	32	18	10.8	35.2
Barley	28	16	15.6	43.2
Wheat	27	16	21.5	55.0
Rye	26	17	18.1	46.2
Flaxseed	25	14	17.5	43.2

* Fluid pressure method is not recommended for estimating lateral loads in bins deeper than their width or diameter.

ture content, gives an indication of desirable temperature and humidity conditions for aerating grain.

Table 5 shows the equilibrium moisture content of grain to be 13 percent with air at 60 degrees F and 61 percent relative humidity. At the same air temperature and 75 percent relative humidity, the grain would pick up moisture. At 50 percent relative humidity and 60 degrees F, it would lose moisture. As a general rule, little wetting of the grain will occur (1) if outside air is 10 to 15 degrees F cooler than the grain, and (2) if no aeration occurs during periods of high humidity. Aerating the grain a few hours each week after the desired temperature has been reached eliminates objectionable odors and prevents the musty smell.

Operating Costs

The electrical requirement to power aerating fans is influenced by air flow rate, type and depth of grain, the degree of uniformity, and the number of seasons when cooling is needed. Small grain such as wheat may be aerated during fall and winter. Using average cost of electricity and considering the above facts, the cost of electricity for aerating grain varies from $\frac{1}{5}$ to $\frac{3}{4}$ cent per bushel.

Controls

Automatic controls that take full advantage of favorable weather are normally used for larger amounts of stored grain; manual controls may be practical for relatively small amounts of grain. Manual controls require a close check of temperature and humidity to determine when to aerate. A **hygrometer**, which contains a wet and dry bulb thermometer, can be used to determine the relative humidity of the air.

A **humidistat** and a **thermostat** in the wiring circuit, as shown in Figure 4, provide automatic control. Both the humidistat and thermostat are adjustable. The humidistat prevents aeration when the air temperature is too high to cool the grain. With these controls, the fan will not operate unless both the humidity and temperature are below the control settings.

Table 5. Approximate Equilibrium Moisture Content of Grain

Grain Moisture Percent (wet basis)	Temperature 60° F		
	40°F	Relative Humidity:	75°F
13	54	61	65
22	47	53	58
11	40	45	51
10	33	37	44

Time Required for Aeration

Studies show an air flow rate of 1/10 CFM per bushel will cool grain by aerating about 80 hours in summer, 120 hours in the fall and 160 hours in the winter. Of course, the air flow rate and degree of uniformity affects cooling time. When the air flow rate is doubled, the time for aeration should be reduced about one-half or *vice versa*.

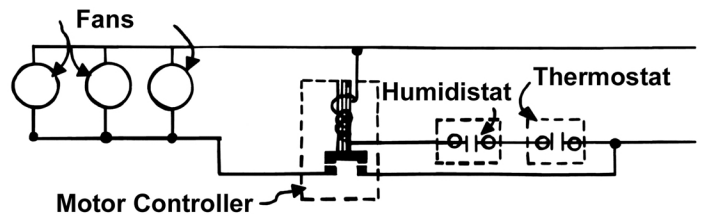


Figure 4.

The permalink for this UGA Extension publication is extension.uga.edu/publications/detail.html?number=B712